

New!

# Models 7251, 7251D and 7351

## 256 or 512-Channel DDC with 4 or 8 200 MHz, 16-bit A/Ds - cPCI



Model 7351 Model 7251D

### Features

- 256 or 512 channels of DDC
- Four or eight 200 MHz 16-bit A/Ds
- Independent tuning for each channel
- DDC decimation from 128 to 1024 in steps of 64
- Independent decimation for each bank
- Each bank independently selects one of four A/Ds
- User-programmable 18-bit FIR filter coefficients
- Default filters offer 0.2 dB ripple and 100 dB rejection
- LVPECL clock/sync bus for multiboard synchronization

### General Information

Models 7251 and 7351 are high-speed software radio cPCI boards. They consist of one Model 7151 Quad A/D digitizer with a factory-installed high-performance 256-channel DDC IP Core mounted on a cPCI carrier board. The Model 7251 is a 6U cPCI board, while the Model 7351 is a 3U cPCI board. Model 7251D is the same as the Model 7251, except it contains two 7151's rather than one.

### A/D Converter Stage

The front end accepts four or eight full-scale analog RF or IF inputs on front panel SMC connectors at +8 dBm into 50 ohms with transformer coupling into four or eight Texas Instruments ADS5485 200 MHz, 16-bit A/D converters. The digital outputs are delivered into Xilinx Virtex-5 FPGAs for routing, formatting and DDC signal processing operations.

### DDC Input Selection and Tuning

These Models employ an advanced FPGA-based digital downconverter engine consisting of four identical 64-channel DDC banks. Four independently controllable input multiplexers select one of the four A/Ds as the input source for each DDC bank. In this way, many different configurations can be achieved including one A/D driving all 256 DDC channels and each of the four A/Ds driving its own DDC bank.

Each of the 256 DDCs has an independent 32-bit tuning frequency setting that ranges from DC to  $f_s$  where  $f_s$  is the A/D sample rate.

### Decimation and Filtering

All of the 64 channels within a bank share a common decimation setting that can range from 128 to 1024, programmable in steps of 64. For example, with a sampling rate of 200 MHz, the available output bandwidths range from 156.25 kHz to 1.25 MHz. Each 64-channel bank can have its own unique decimation setting supporting as many as four different output bandwidths for the board.

The decimating filter for each DDC bank accepts a unique set of user-supplied 18-bit coefficients. The 80% default filters deliver an output bandwidth of  $0.8 \cdot f_s / N$ , where N is the decimation setting. The rejection of adjacent-band components within the 80% output bandwidth is better than 100 dB.

Each DDC delivers a complex output stream consisting of 24-bit I + 24-bit Q samples at a rate of  $f_s / N$ . Any number of channels can be enabled with each bank, selectable from 0 to 64. Each bank includes an output sample interleaver that delivers a channel-multiplexed stream for all enabled channels within the bank.


### Output Multiplexers and FIFOs

Four output MUXs can be independently switched to deliver either A/D data or DDC data into each of the four output FIFOs. This allows users to view either the wideband A/D data or the narrowband DDC data, depending on the application.

Each of the output FIFOs operates at its own input rate and output rate to support different DDC decimation settings between the banks and efficient block transfers to the PCI bus. ➤



Model 7251 and 7351 Block Diagram Model 7251D doubles all resources except the PCI Bridge

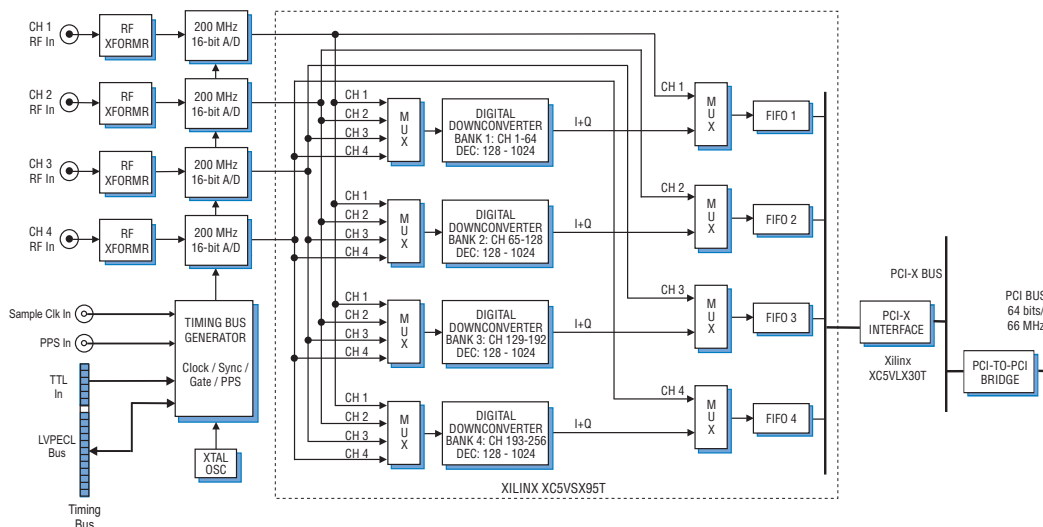

► **Clocking and Synchronization**

The architecture includes a flexible timing and synchronization circuit that allows the A/Ds to be clocked by internal or external clock sources and a multiboard timing bus. The timing bus includes a clock, a sync, two gate or trigger signals and a PPS signal. The timing bus can be driven by an internal crystal oscillator, a front panel reference input or the LVPECL bus.

A front panel 26-pin LVPECL Clock/Sync connector allows multiple boards to be synchronized. In the slave mode, it accepts differential LVPECL inputs that drive the clock, sync, gate and PPS signals for the internal timing bus.

In the master mode, the LVPECL bus can drive the timing signals for synchronizing multiple boards. Up to two slave 7251Ds or three slave 7351s can be driven from the LVPECL bus master, supporting synchronous sampling and sync functions across all connected boards. More boards can be synchronized with an external clock and sync generator.

**PCI Interface**

Both models include an industry-standard interface fully compliant with PCI bus specifications. The interface includes four separate DMA controllers for efficient transfers to and from the boards.

Data widths of 32 or 64 bits and data rates of 33 and 66 MHz are supported.

**Specifications**

**Model 7251 or 7351:** 4 A/Ds, 256-channel DDC

**Model 7251D:** 8 A/Ds, 512-channel DDC

**Model 7251D shown in the Specifications**

**Front Panel Analog Signal Inputs (8)**

**Input Type:** Transformer-coupled, front panel female SMC connectors

**Transformer Type:** Coil Craft WBC4-6TLB

**Full Scale Input:** +8 dBm into 50 ohms

**3 dB Passband:** 300 kHz to 700 MHz

**A/D Converters (8)**

**Type:** Texas Instruments ADS5485

**Sampling Rate:** 10 MHz to 200 MHz

**Internal Clock:** 200 MHz crystal osc.

**External Clock:** 10 to 200 MHz

**Resolution:** 16 bits

**A/D Data Reduction Mode:** Data from the A/Ds can be decimated by any value between 1 and 4096

**Clock Sources (4):** Selectable from onboard crystal oscillators, external or LVPECL clocks

**External Clocks (4)**

**Type:** Front panel female SMC connector, sine wave, 0 to +10 dBm, AC-coupled, 50 ohms

**Sync/Gate Bus:** 26-pin connector, clock/sync/gate/PPS input/output LVPECL bus; one gate/trigger and one sync/PPS input TTL signal

**Field Programmable Gate Array (4)**

**Processing FPGA:** Two Xilinx Virtex-5 XC5VSX50T; optional FPGAs include: XC5VLX50T, XC5VSX95T, and XC5VLX155T

**Interface FPGA:** One Xilinx Virtex-5 XC5VLX30T dedicated to the PCI interface in the standard unit; optional FPGA: XC5VSX50T

**PCI Interface**

**PCI Bus:** 32 or 64 bits at 66 MHz and 32 or 64 bits at 33 MHz

**DMA:** 8 channel demand-mode and chaining controller

**Local Bus:** 64 bits at 33, 66 and 100 MHz

**Environmental**

**Operating Temp:** 0° to 50° C

**Storage Temp:** -20° to 90° C

**Relative Humidity:** 0 to 95%, non-cond.

**Size:** standard 6U cPCI board

**Ordering Information**

Model	Description
7251	256-Channel DDC with four 200 MHz, 16-bit A/Ds - 6U cPCI
7251D	512-Channel DDC with eight 200 MHz, 16-bit A/Ds - 6U cPCI
7351	256-Channel DDC with four 200 MHz, 16-bit A/Ds - 3U cPCI


**Options:**

-730 Two-slot heat sink

*Contact Pentek for available options.*


A/D Performance

Spurious-Free Dynamic Range

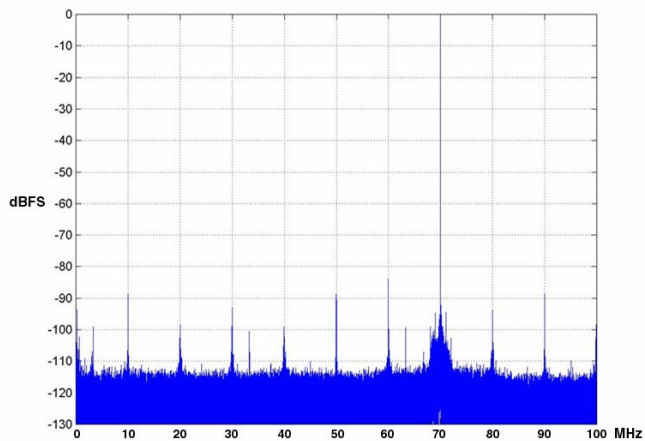


$f_{in} = 70$  MHz,  $f_s = 200$  MHz, Internal Clock

Spurious Pickup

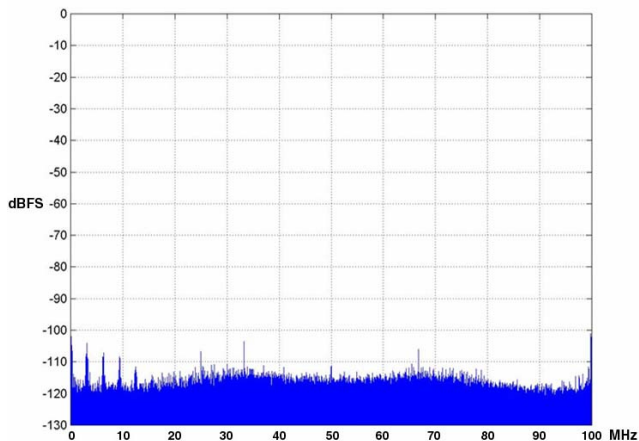


$f_s = 200$  MHz, Internal Clock

Input Frequency Response

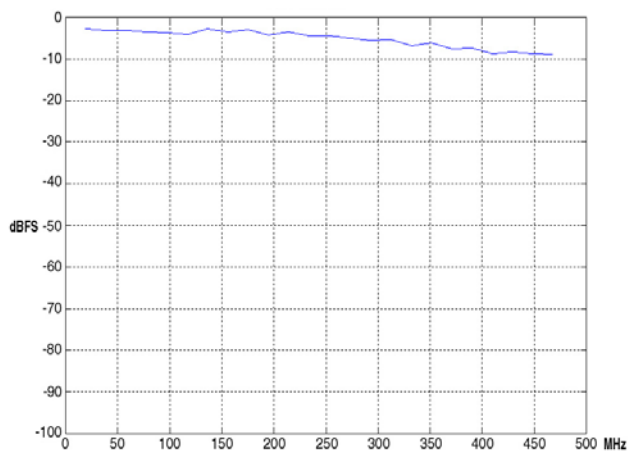


$f_s = 200$  MHz, Int. Clock

Two-Tone SFDR

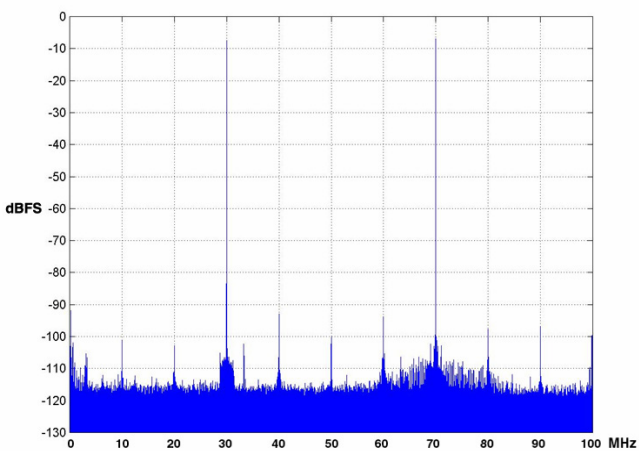


$f_{in1} = 30$  MHz,  $f_{in2} = 70$  MHz,  $f_s = 200$  MHz, Int. Clock

Adjacent Channel Crosstalk

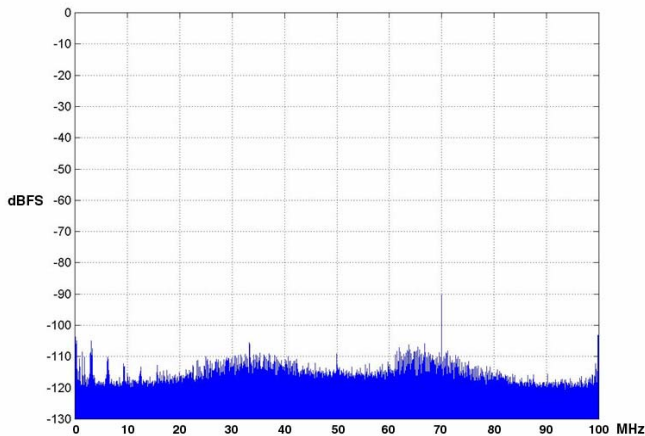

$f_{in} = 70$  MHz,  $A_{in} = 0$  dBFS,  $f_s = 200$  MHz, Int. Clock

Phase Noise at 70 MHz

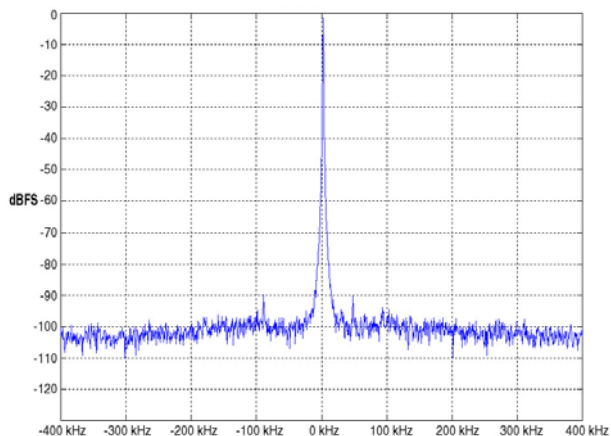

$f_s = 200$  MHz, Int. Clock