



#### Features

New!

- Designed to meet MIL-STD-810 shock and vibration
- Designed to meet EMC/EMI per MIL-STD-461 EMC
- 4U 19-inch rugged rackmount PC server chassis, 22" deep
- Windows<sup>®</sup> 7 Professional workstation with high-performance Intel<sup>®</sup> Core<sup>™</sup> i7 processor
- Sample rates up to 3.6 GHz in single-channel mode
- Sample rates up to 1.8 GHz in dual-channel mode
- Capable of recording RF/IF frequencies to 1.75 GHz in single-channel mode
- Capable of recording RF/IF frequencies to 2.8 GHz in dual-channel mode
- 12-bit A/D, with 16- and 8-bit packing modes
- Real-time aggregate recording rates of up to 4.8 GB/sec
- Up to four front-panel removable QuickPac SSD drive canisters with eight drives each
- Up to 61 terabytes of storage to NTFS RAID disk array
- SystemFlow<sup>®</sup> GUI with signal viewer analysis tool
- C-callable API for integration of recorder into application
- File headers include time stamping and recording parameters
- Optional GPS time and position stamping



#### **General Information**

The Talon<sup>®</sup> RTX 2769 is a turnkey system that is built to operate under harsh conditions. Designed to withstand high vibration and operating temperatures, the RTX 2769 is intended for military, airborne and UAV applications requiring a rugged system.

Aimed at recording high-bandwidth signals, the RTX 2769 uses 12-bit, 3.6 GHz A/D converters. It can be configured as a one- or two-channel system and can record sampled data, packed as 8-bit- or 16-bit-wide consecutive samples (12-bit digitized samples residing in the 12 MSBs of the 16-bit word). A high-speed RAID array provides a maximum streaming recording rate to disk of 4.8 GB/sec.

The RTX 2769 uses Pentek's highpowered Virtex-7-based Onyx<sup>®</sup> boards that provide the data streaming engine for the high-speed A/D converters. Channel and packing modes as well as gate and trigger settings are among the GUI-selectable system parameters, providing complete control over this ultra wideband recording system.

Optional GPS time and position stamping allows the user to capture this critical information in the header of each data file.

#### SystemFlow Software

The RTX 2769 includes the SystemFlow Recording Software. SystemFlow features a Windows-based GUI (Graphical User Interface) that provides a simple means to configure and control the system.

Custom configurations can be stored as profiles and later loaded when needed,

allowing the user to select preconfigured settings with a single click.

SystemFlow also includes signal viewing and analysis tools that allow the user to monitor the signal prior to, during, and after a recording session. These tools include a virtual oscilloscope and a virtual spectrum analyzer.

Built on a Windows 7 Professional workstation, the RTX 2769 allows the user to install post-processing and analysis tools to operate on the recorded data. The RTX 2769 records data to the native NTFS file system that provides immediate access to the recorded data.


Data can be off-loaded via two rearaccess gigabit Ethernet ports, two USB 3.0 ports or up to four USB 2.0 ports.

#### **Rugged Mil-Spec Chassis**

The Talon RTX 2769 uses a shock- and vibration-isolated inner chassis and solid-state drives to assure reliability under harsh conditions. The chassis uses an in-line EMI filter along with rear-panel MIL-style connectors to meet MIL-STD-461 emissions specifications.

Up to four front-panel removable QuickPac drive canisters are provided, each containing up to eight SSDs. Each drive canister can hold up to 7.6 TB of data storage and allows for quick and easy removal of mission-critical data.

Forced-air cooling draws air from the front of the chassis and pushes it out the back via exhaust fans. A hinged front door with a serviceable air filter provides protection against dust and sand. >

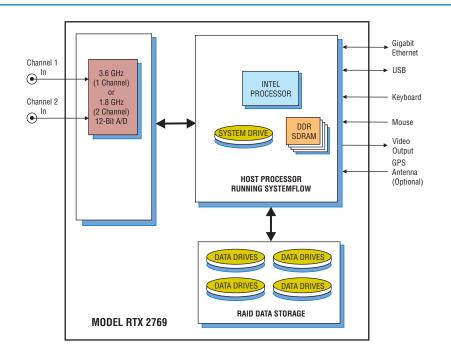


Pentek, Inc. One Park Way & Upper Saddle River & New Jersey 07458 Tel: 201/818/5900 & Fax: 201/818/5904 & Email: info@pentek.com

www.pentek.com

Model RTX 2769

#### SystemFlow Graphical User Interface




#### SystemFlow Recorder Interface

The RTX 2769 GUI provides the user with a control interface for the recording system. It includes Configuration, Record and Status screens, each with intuitive controls and indicators. The user can easily move between screens to set configuration parameters, control and monitor a recording and monitor board temperature and voltage levels. The signal viewer, integrated into the recording GUI, allows the user to monitor real-time signals or signals recorded on disk.

Channel 1 I	nput Param	eters
Bandwidth:	1000.0	MH2 V
O Decimation		
Downconversion.		
Input Source:	Acc 1 4	
Center Frequency:		MHZ
Gate / Trigger Mode.	None	1
Gate / Trigger Polarity:	Territor	
Sync Source:	there w	
Pulsed Radar		
Trigger Length:		Samples
A/D Sampling Rate.	2000,0	MHz
Disk Data Rate:	2000.0	WS/a

#### SystemFlow Hardware Configuration Interface

The RTX 2769 Configure screens provide a simple and intuitive means for setting up the system parameters. The configuration screen shown here, allows user entries for input source, sampling frequency, as well as gate and trigger information. All parameters contain limit-checking and integrated help to provide an easier-to-use out-of-the-box experience.

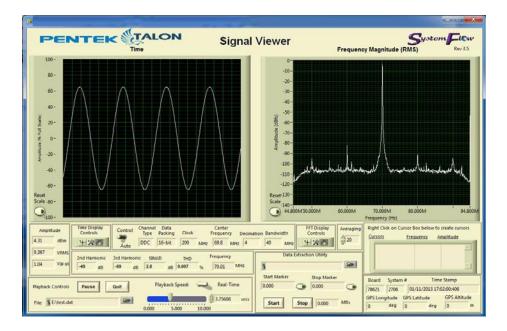

#### SystemFlow Signal Viewer

The SystemFlow Signal Viewer includes a virtual oscilloscope and spectrum analyzer for signal monitoring in both the time and frequency domains. It is extremely useful for previewing live inputs prior to recording, and for monitoring signals as they are being recorded to help ensure successful recording sessions. The viewer can also be used to inspect and analyze the recorded files after the recording is complete. Advanced signal analysis capabilities include automatic calculators for signal amplitude and frequency, second and third harmonic components, THD (total harmonic distortion) and SINAD (signal to noise and distortion). With time and frequency zoom, panning modes and dual, annotated cursors to mark and measure points of interest, the System-Flow Signal Viewer can often eliminate the need for a separate oscilloscope or spectrum analyzer in the field. >



Pentek, Inc. One Park Way 
Upper Saddle River
New Jersey 07458
Tel: 201/818-5900 
Fax: 201/818-5904 
Email: info@pentek.com

# Specifications

#### PC Workstation (standard configuration)

**Operating System:** Windows 7 Professional Processor: Intel Corei7 processor Clock Speed: 3.0 GHz or higher SDRAM: 8 GB **Data Storage** Style: Up to four front-panel removable QuickPac drive canisters; up to eight SSDs contained in each canister Location: Front panel

Capacity: Up to 61 TB Number of Drives: Up to 32 total Supported RAID Levels: 0, 1, 5 and 6

#### **Analog Recording Input Channels**

**Analog Signal Inputs** Connector Type: Rear-panel female SMA connectors Input Type: Transformer-coupled Full Scale Input: +4 dBm into 50 ohms Input Transformers 3 dB Passband: 4.5 kHz to 3.0 GHz **A/D Converters** Type: Texas Instruments ADC12D1800 Sampling Rate: Single-channel mode: 500 MHz to 3.6 GHz

Dual-channel mode: 150 MHz to 1.8 GHz

Resolution: 12 bits

#### Maximum Usable Input Frequency Single-channel mode: 1.75 GHz Dual-channel mode: 2.8 GHz

Full Scale Input: +2 dBm to +4 dBm, programmable

**Digital Downconverters** Modes: One or two channels, programmable Supported Sample Rate (*f*<sub>c</sub>): One-channel mode: 3.6 GHz Two-channel mode: 1.8 GHz **Decimation Range (D):** One-channel mode: 8x, 16x, 32x, bypass Two-channel mode: 4x, 8x, 16x, bypass **DDC Usable Bandwidth:**  $0.4*f_c/D$ Sample and Reference Clocks Sample Clock Source: Internal fixed-frequency or programmable oscillator (selectable by Option number); in single-channel mode, the sample rate is 2x the clock frequency; in dual-channel mode, the sample rate equals the clock frequency Reference Clock: External 10 MHz reference at 0 to +4 dBm to phase-lock the clock oscillator Connector Type: Rear-panel female SMA connector External Trigger Number: One common trigger for both channels Input Level: LVTTL with selectable rising or falling edge Connector Type: Rear panel female SMA connector **Physical and Environmental** 

Dimensions: 19" W x 22" D x 7" H Weight: 50 lb, approx. **Operating Temp:** –20° to +50° C **Storage Temp:** –40° to +85° C Relative Humidity: 10% to 95%, non-condensing Operating Shock: Designed to MIL-STD 810F, method 514.5, procedures I and VI Operating Vibration: Designed to MIL-STD 810F, method 514.5, procedure I EMI/EMC: Designed to MIL-STD 461E, CE101, CE102, CS101, CS113, RE101, RE102, RS101, RS103 Input Power: 85 to 264 VAC, 47-400 Hz, 600 W max.

# Model RTX 2769 Order Information and Options

## **Sample Clock Options**

Option -910	User-Programmable Sample Clock
	Dual-channel mode sample clock range
	150 MHz – 945 MHz
	970 MHz – 1134 MHz
	1213 MHz – 1417.5 MHz
	Single-channel mode sample clock range
	500 MHz – 1890 MHz
	1940 MHz – 2268 MHz
	2426 MHz – 2835 MHz
Option -911	Fixed-frequency clock
	1.5 / 3.0 GHz sample clock
Option -912	Fixed-frequency clock
	1.6 / 3.2 GHz sample clock
Option -915	Fixed-frequency clock
	1.8 / 3.6 GHz sample clock
Sample rates are	set up for dual-channel mode first and

single-channel mode second: e.g. 1.5 / 3.0 is 1.5 in dualchannel mode and 3.0 in single-channel mode.

#### Storage Options

Option -410	3.8 TB SSD storage
Option -415	7.6 TB SSD storage
Option -420	15.3 TB SSD storage
Option -430	30.7 TB SSD storage
Option -460	61.0 TB SSD storagage

# **General Options**

Option -261	GPS time & position stamping
Option -264	IRIG-B time stamping
Option -680	28 VDC power supply
Option -625	Front-panel removable OS drive

#### **Contact Pentek for compatible Option combinations**

Storage and Channel-count Options may change, contact Pentek for the latest information

Specifications are subject to change without notice



**Pentek, Inc.** One Park Way • Upper Saddle River • New Jersey 07458 www.pentek.com Tel: 201.818.5900 Fax: 201.818.5904 Email: info@pentek.com



Figure 1. Rackmount RTX chassis is designed to meet or exceed Mil Specs.





Figure 2. Chassis View showing one QuickPac canister partially withdrawn.




Figure 3. Dimensional drawings of the rackmount enclosure.

# **Extreme Rackmount Recorders**

Pentek's Talon<sup>®</sup> RTX Rackmount series recorders are designed to provide a combination of high performance and large storage capacity in a military-specified rackmount chassis. Designed for field operation, the RTX Rackmount series provides up to 30 TB of SSD storage with aggregate recording rates up to 5 GB/sec.

# **Military Specifications**

All Talon RTX rackmount recorders are designed to meet military specifications for temperature, altitude, shock, vibration, radiated emissions, conducted emissions, ESD, sand and dust.

The following list contains these military specifications.

• Vibration: MIL-STD-810F, method 514.5

- Shock: MIL-STD-810F, method 516.5
- EMI/EMC:

MIL-STD-461E, CE101, CE102, CS101 CS114, RE101, RE102, RS101, RS103

- ESD:
- Sand & Dust: MIL-STD-810F, method 510

MIL-STD-1686A

# **Chassis Design**

All Talon RTX rackmount chassis are specially designed using heavy-duty wrought aluminum extrusions to provide superior torsional strength. Extrusions are partially overlapped for superior EMC. The chassis is 4U in height, with a depth of only 22". A fully-loaded chassis weighs as little as 45 lb.

Rear-panel I/O includes bulk-head mounted SMA connectors, a 4-pin 38999 power connector as well as motherboard I/O. Rear-panels are modular and customizable allowing the end-user to specify the desired connectors.

The Operating System drive can be internally hard-mounted or can be made removable. Additionally an internallymounted optical DVD writer is optional. All drives, OS, DVD and data drives are protected from dust with EMI filters.



Figure 4. The rear panel includes all analog signal connections and can be customized to suit the application requirements.

### **QuickPac Canisters**

In order to provide field engineers the ability to quickly remove and replace storage drives in the field, Pentek has developed the QuickPac<sup>™</sup> canisters for use in the Talon RTX rackmount chassis. These canisters hold eight SSDs, providing up to 7.68 TB of storage capacity in each canister. Up to four QuickPac canisters can be installed in a Talon RTX rackmount chassis, providing a total storage capacity of 30 TB.

Fastened by four thumbscrews, QuickPac canisters can easily be swapped in the field, allowing users to replace those filled with data with new, empty ones with very little down time. QuickPac canisters can be transported to the lab for offload or analysis, using one of Pentek's Talon offload or playback systems.



Figure 5. Front and rear view of the QuickPac canister showing the eight SSDs inside.

# **Floating Inner Chassis**

In order to withstand conditions of high vibration and shock, the RTX rackmount chassis is designed to isolate all critical system components by placing them on a floating inner chassis.

This inner chassis is suspended using multiaxis mounts that attenuate externallytransmitted shock and vibration energy. This allows the system to perform flawlessly in aircraft, ships, ground vehicles, UAVs or any other areas of high shock or vibration.



Figure 6. The inner chassis floats with respect to the outer enclosure to improve isolation from shock and vibration.



# Cooling and Filtering

Every RTX recorder includes a highpowered forced air-cooling system, to allow the proper transfer of heat from hot system components out the back of the chassis. Cool air is pulled from the front of the system through the QuickPac drive packs and forced over the hottest system components to ensure optimal cooling. High-powered fans can be controlled

via system software to allow the system to

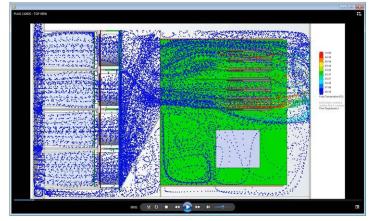


Figure 7. Airflow map shows the extensive ventilation provided to all components inside the RTX rackmount recorder.

run quietly with lower cooling levels or at maximum air flow levels. This can be adjusted to match the user's application.

Every RTX recorder includes filtering necessary to protect the system as well as the surrounding operating environment. EMI filters are placed on the front and rear of the chassis, to protect the surrounding environment from radiated emissions. A removable front panel filter protects the system against dust and sand.

# **Modular Power Supply**

Every Talon RTX rackmount Recorder includes a 600 Watt, 85 – 264 V, 47– 400 Hz AC power supply. The power supply has an inline EMI filter to protect against conducted emissions and is isolated from the other electronics in the system, via an isolated chassis compartment. The 400 Hz rating allows every RTX rackmount recorder to operate in aircraft and other environments where smaller, 400 Hz generators are used. For applications that require DC power, 24 V and 28 V DC power supplies are available to replace the AC power supply.

#### **Talon Solutions Chart**

The chart below compares Pentek's different Talon Recording System solutions. As seen here, the RTX Rackmount series provide high performance and large storage capacity in a rugged package that meets highlevel military specifications.

		,	unoun senes	lever minury speen	
Talon Chassis Type	RTS-COTS Rackmount	RTR Portable	RTR Rackmount	RTX Rackmount	RTX 1/2 ATR
Dimensions (H"xW"xL")	7x19x26	13.4x16.9x9.5	7x19x21/26	7x19x22	8.1x7.1x16.5
Weight (lb)	60–85	30–35	45–85	45–60	30–35
Cooling	Forced-air	Forced-air	Forced-air	Forced-air	Conduction
Storage Drive Type	HDD	SSD	SSD	SSD	SSD
Max. Storage Capacity (TB)	60	7.6	38.4	30.7	3.8
Max. Record Rate (MB/sec)	1600	1600	5000	5000	500
Drive Removal	Individual (with trays)	Individual (no trays)	Individual (with trays)	QuickPac Canisters	Internal (needs disassembly)
Operating Temperature (deg C)	5 to 45	0 to 50	-10 to 55	-20 to 55	-40 to 71
Operating Altitude (ft)	10,000	10,000	10,000	15,000	65,000
Shock	-	15 g	15 g	MIL-STD-810F Method 516.5	MIL-STD-810F Method 516.5
Vibration	_	1.4 g 20–500 Hz	1.4 g 20–500 Hz	MIL-STD-810F Method 514.5	MIL-STD-810F Method 514.5
EMI/EMC	-	-	-	MIL-STD-461E CE101, CE102, CS101 CS114, RE101, RE102 RS101, RS103	MIL-STD-461E CE101, CE102, CS101 RE101, RE102, RS101
ESD	-	-	_	MIL-STD-1686A	_
Sand and Dust	-	_	-	MIL-STD-810F Method 510	MIL-STD-810F Method 510



# **Appendix A - System Specifications Summary**

Parameter	Condition	Specification
Temperature	Operating Non-operating	-20 <sup>0</sup> C to +55 <sup>0</sup> C -40 <sup>0</sup> C to +70 <sup>0</sup> C
Altitude	Operating Non-operating	0 to 15,000 ft 0 to 40,000 ft
Humidity	Operating	0–95%, non-condensing
Fungus	Operating	No fungus nutrient material shall be used
Shock	Operating	MIL-STD-810F, Method 516.5, Procedure I (functional shock), 20 g half sine, 12 msec in each axis
Vibration	Operating	MIL-STD-810F, Method 514.5, Procedure I
Airborne Noise	Operating	60 dBA max at 1 meter from the equipment
Structure-borne Noise	Operating	Maximum structure-borne noise per MIL- STD-704-2 is no greater than 60 dB one- third octave L <sub>a</sub> , (Type III)
Blowing Dust	Operating	The unit shall resume specified performance after exposed to settling-dust conditions defined in MIL-STD-810F, Method 510, Procedure II - See Note 1
Inclination Angles	Operating	<ul> <li>The unit shall maintain specified performance when subjected to:</li> <li>A static pitch angle of ±5<sup>0</sup></li> <li>A list angle of 15<sup>0</sup></li> <li>A roll angle of 45<sup>0</sup></li> </ul>

Note 1: Standard maintenance includes cleaning of the dust filter(s) as required.

## **Appendix B - Emissions Specifications Summary**

- CE102: Conducted Emissions, Power Leads, 10 kHz to 10 MHz
- CS101: Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz
- CS114: Conducted Susceptibility, Bulk Cable Injection, 10 kHz to 400 MHz
- CS116: Conducted Susceptibility, Damped Sinusoidal Transients, Cable and Power Leads, 10 kHz to 100 MHz
- RE101: Radiated Emissions, Magnetic Field, 30 Hz to 100 kHz
- RE102: Radiated Emissions, Electric Field, 10 kHz to 18 GHz
- RS101: Radiated Susceptibility, Magnetic Field, 30 Hz to 100 kHz
- RS103: Radiated Susceptibility, Electric Field, 10 kHz to 40 GHz

Specifications are subject to change without notice

